

CHAINSAW HELMET - ASSEMBLY INSTRUCTIONS





Fit the head band suspension unit into the helmet by inserting the 4 hanger tabs (A) into the slots (B).

Ensure that the size adjuster is at the rear, & the brow band facing the front as shown.

Push all 4 tabs (A) fully home until they click into place.

Install the ear defenders by inserting the pegs (C) into the slots (D) on either side of the helmet.

Ensure all 3 pegs are pushed fully home into the slots.

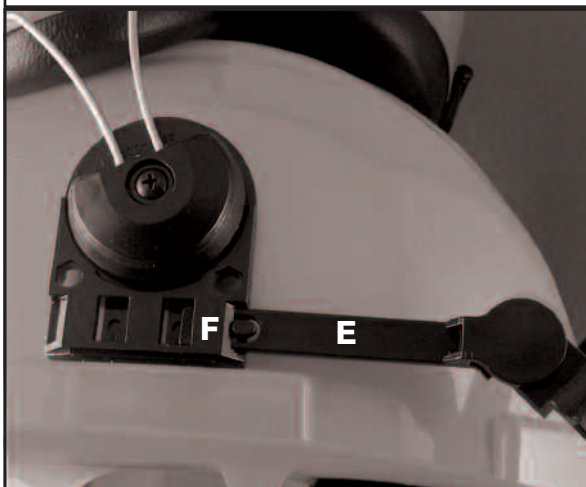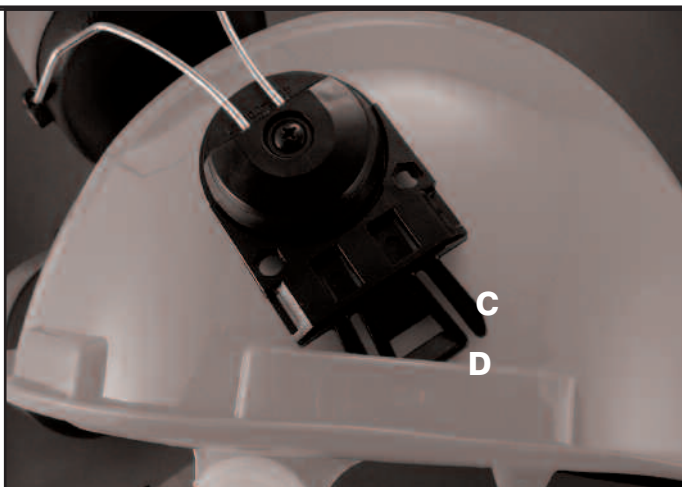

Checking that the arms are uppermost as shown, install the face guard support saddle by locating the arms (E) into the slots on the ear defenders (F). Push both arms until they click into place in the locking cut-outs (F) as shown. Ensure both arms are in the same cut-outs.

Fit the steel mesh face guard by positioning the centre slot onto the centre turn-buckle (G) on the support saddle. Lock into place by gently rotating the turn-buckle to the vertical position as shown.

Repeat for the other turn-buckles into the remaining face guard slots.



In the unlikely event that any parts are found to be missing or damaged, please contact 01423 797208 for replacements.